


POCKETHERM

WATERPROOF thermometer with fold out probe

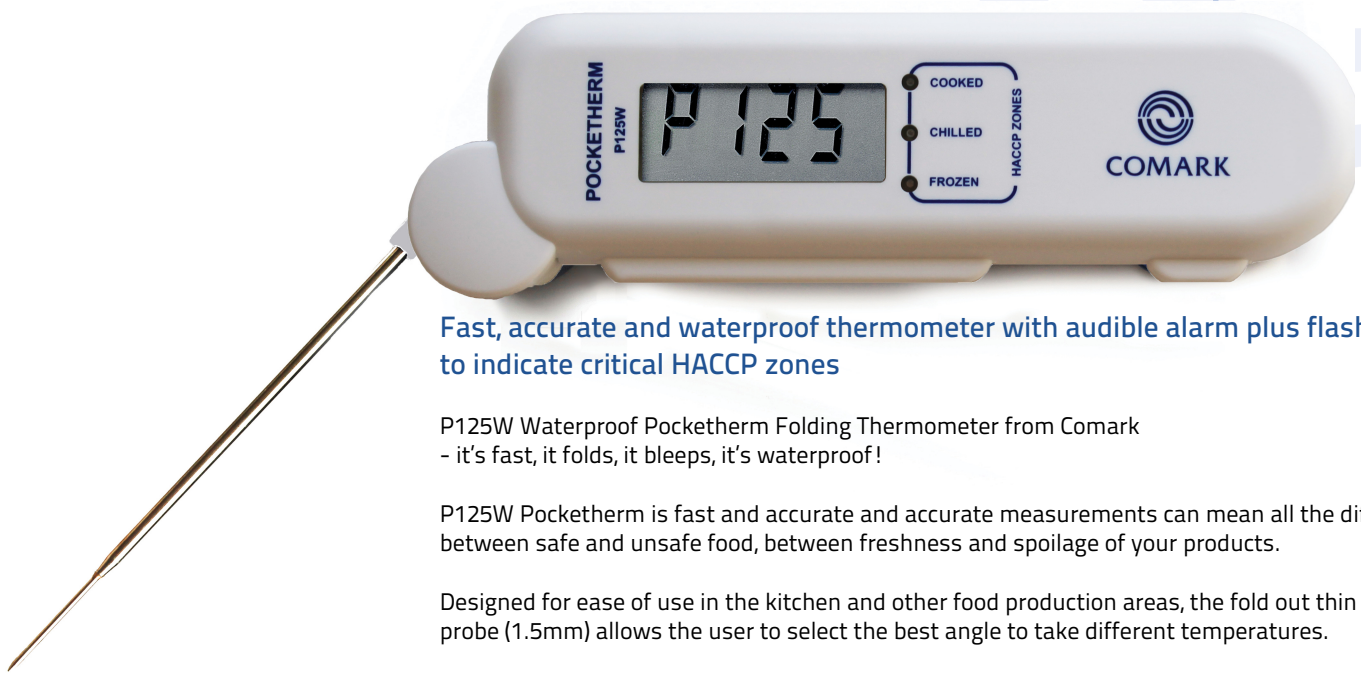

Fast, accurate and waterproof thermometer with audible alarm plus flashing LEDs to indicate critical HACCP zones

P125W Waterproof Pocketherm Folding Thermometer from Comark - it's fast, it folds, it beeps, it's waterproof!


P125W Pocketherm is fast and accurate and accurate measurements can mean all the difference between safe and unsafe food, between freshness and spoilage of your products.

Designed for ease of use in the kitchen and other food production areas, the fold out thin tip steel probe (1.5mm) allows the user to select the best angle to take different temperatures.

Features

- Flashing LEDs plus buzzer for instant temperature indication - Yellow for Frozen, Green for Chilled and Red for Cooked
- Meets the requirements of DIN EN 13485:2002 Quick Frozen Food Guidelines
- Probe can be angled for ergonomic use
- Range: -40°C to $+125^{\circ}\text{C}$
- Auto switch off to preserve battery life
- Improved Battery Life of up to 4000 hours
- Waterproof to IP65
- New model P125W/82 has cooked zone indication at $+82^{\circ}\text{C}^*$
- Standard P125W model has cooked zone indication at $+75^{\circ}\text{C}$

Change your cooking experience with Pocketherm!

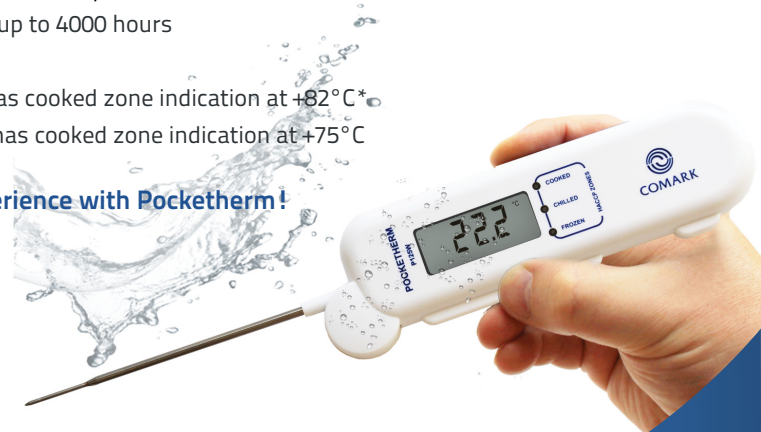

The Professionals' Choice

POCKETHERM

WATERPROOF thermometer with fold-out probe



Comark Instruments

52 Hurricane Way
Norwich, Norfolk, NR6 6JB
United Kingdom
Tel: +44 (0) 207 942 0712
Fax: +44 (0) 207 942 0714
Email: sales@comarkinstruments.com

Comark Instruments

P.O. Box 500
Beaverton, OR97077, USA
Tel: +1 (503) 643 5204
Toll Free: (800) 555 6658
Fax: +1 (503) 627 5311
Email: sales@comarkusa.com



Specifications P125W and P125W/82

Sensors	Thermistor
Measurement range	-40 °C to +125° C
Scales	°C
Displayed resolution	0.1°
System accuracy at -20° C to +30° C	±0.5° C, -20° C to +70° C / ±1° C full range
Response time (T ⁹⁹)	5 seconds
Environment	
Operating temperature	-20°C to +50°C
Storage temperature	-30° C to +70° C
Humidity	10 to 90%non-condensing
HACCP Zones P125W	
Frozen	T ≤ -18°C
Chilled	0°C ≤ T ≤ 5°C
Cooked	T ≥ 75°C
HACCP Zones P125W/82	
Frozen	T ≤ -18°C
Chilled	0°C ≤ T ≤ 5°C
Cooked	T ≥ 82°C
Power	2 x alkaline AA cells (ANSI 15A IEC LR6)
Battery life	4000 hours
Enclosure ingress protection	IP65

Importør:

Impex Produkter AS
Gamle Drammensvei 107
1363 HØVIK
Tel. 22 32 77 20
info@impex.no
www.impex.no

Warranty

All Comark instruments have a minimum one year warranty unless otherwise stated. The warranty for temperature probes is six months and all other probes are unwarranted because the conditions of use are beyond our control. The Comark Warranty covers manufacturing defects and component failure and applies worldwide. In line with our policy of continuous development, we reserve the right to alter any product specification without notice. Comark has an accredited UKAS (NIST equivalent) calibration laboratory for temperature and humidity measurement and offers full service and recalibration facilities.

All rights reserved. Data subject to alteration without notice. All trademarks are the property of their respective owners. Modification of this document is not permitted without written permission from Comark Instruments.

© 2016 Comark Instruments Part No. 20480-1