

# KERN SXS30K-2L

Stainless steel platform scale with stainless steel IP68 display and EC type approval [M]



## Measuring system

Adjustment options:	External calibration
Eccentric loading at 1/3 [Max]:	500 mg
Linearity:	6 g
Load cell connection:	6-wire
Readability [d]:	2 g
Recommended adjusting weight:	30 kg (M1)
Repeatability:	2 g
Resolution:	15000
Stabilisation time under laboratory conditions:	2 s
Warm up time:	30 min
Weighing capacity [Max]:	30 kg
Weighing system:	Strain gauge
Weighing units:	oz kg g lb

## Display

Display digit height (large):	5,500 cm
-------------------------------	----------

## Counting

Counting resolution:	30000
Minimum piece weight at piece counting (Laboratory):	1 g
Minimum piece weight at piece counting (Normal):	10 g

## Functions

Counting function:	yes
PRE-TARE function:	yes
Vibration-free weighing (Animal weighing program):	yes
Weighing with tolerance range:	yes

## Environmental conditions

Maximum humidity:	80 %
Maximum operating temperature:	40 °C
Minimum ambient temperature:	-10 °C
Minimum humidity:	0 %

## Power supply

Charging time:	12 h
Input voltage:	220 V - 240 V AC 50 Hz
Mains adapter/adaptor included:	EURO
Operating time (Backlight off):	80 h
Operating time (Backlight on):	40 h

## Services (optional)

Adjustment at the location of installation: 961-248

DAkkS Certificate: 963-128

## Category

Brand:	KERN
Category:	Balances
Product Group:	Industrial scale

## Packaging & shipping

Delivery:	24 h
Dimensions packaging (WxDxH):	490 x 790 x 235 mm
Gross weight:	23,700 kg
Net weight:	20,800 kg
Shipping method:	Parcel service

## Construction

Cable length of display device:	2,500 m
Dimensions of display device (WxDxH):	232 x 150 x 80 mm
Dimensions of weighing plate (WxDxH):	500 x 400 x 123 mm
Level indicator:	yes
Material weighing plate:	stainless steel
Revolving screw feet:	yes
Wall mount:	yes
Weighing surface (WxD):	500 x 400 mm


# KERN SXS30K-2L



Stainless steel platform scale with stainless steel IP68 display and EC type approval [M]

## Piktogramme

### STANDARD

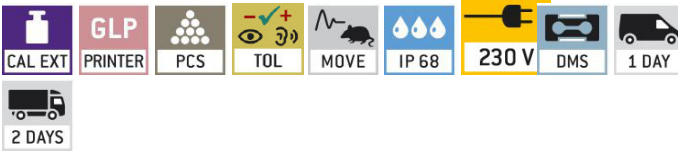

### OPTION



### FACTORY

