

thermo scientific



Thermo Scientific Eutech Elite Series Waterproof Pocket Testers

Accurate, on-the-go solutions
for water analysis

Importør:
Impex Produkter AS
Gamle Drammensvei 107
1363 Høvik
www.impex.no
info@impex.no
Tel.: 22 32 77 20



ThermoFisher
SCIENTIFIC

Thermo Scientific Eutech Elite Series Pocket Testers

- 1-push calibration
- Large 4-digit double line display
- Backlit graphic display
- Auto-hold readings
- IP67 waterproof rating
- Easy-to-operate, intuitive keypad
- Transparent wide-base cap with fill line
- 1 year warranty
- AAA battery powered



Lanyard provision for on-the-go measurement



Carry soft-case kit for accessory organization



Includes (4) AAA batteries for operation and easy replacement



Easy-to-replace sensor




Wide, stable base allows the tester to stand independently



Display:

- Large double line LCD display with backlight
- Display closer to surface of tester for a better viewing angle
- Simultaneous display of measurement and temperature

Keypad:

- Easy-to-operate user interface with the addition of the  key
- 1 push calibration

Cap:

- Leakproof
- Fill-line indicator for measurement
- Wider, stable base to stand the tester upright

Additional Features:

- Bluetooth™ low energy (BTLE) enabled (optional)
- Multi-language instructions available
- Pocket tester floats and meets waterproof IP67 rating



Thermo Scientific Eutech Elite pH Pocket Tester

pH/Temperature

The Thermo Scientific™ Eutech™ Elite pH pocket tester features a simultaneous display of pH and temperature. One of the most common scientific measurements in the world today is pH, which measure the alkalinity and acidity of a liquid. Common industries that measure pH range from drinking water and wastewater treatment, chemical production, aquaculture, agriculture research and production, environmental monitoring, chemical and life sciences research, biochemical and pharmaceutical research, electronics production to food processing and other industrial applications.



Specifications

Specifications		
pH	Range	-1.00 to 15.00 pH
	Resolution	0.01 pH
	Relative Accuracy	±0.01 pH ±1 LSD
	Calibration Points	Up to 3 points
	Buffer Set Standard Selection	USA - 4.01 / 7.00 / 10.01 NIST - 4.01 / 6.86 / 9.18
	Calibration Window	±1.00 pH
	Calibration Type	Point to point
Temperature	Range	0 to 60.0 °C / 32.0 to 140.0 °F
	Resolution	0.1 °C / 0.1 °F
	Accuracy	From 0 to 50 °C (±0.5 °C / ±0.9 °F + 1 LSD) From 50 to 60 °C (±1.0 °C / ±1.8 °F + 1 LSD)
	Compensation	Yes (ATC)
	Calibration Window	±5.0 °C / ±9.0 °F
Accessories	Replacement pH sensor, soft carry case, lanyard, clear sample/storage cap, AAA batteries	

Ordering Information

Order Code	Product Description
Pocket Tester	
ELITEPH	Thermo Scientific Eutech Elite pH pocket tester
pH Buffer Sachets	
ECBU4BS	pH 4.01 (NIST traceable), box of 20 x 20 mL sachets
ECBU7BS	pH 7.00 (NIST traceable), box of 20 x 20 mL sachets
ECBU10BS	pH 10.01 (NIST traceable), box of 20 x 20 mL sachets
ECRINWT	pH deionized water (NIST traceable), box of 20 x 20 mL sachets
ECBU4710R	pH buffer sachet set, pH 4.01, 7.00, 10.01, deionized water, 5 x 20 mL each
Storage & Cleaning Solutions	
ECRE005	Storage solution for pH sensor, 480 mL
ECDPCBT	Protein remover solution, 480 mL

Thermo Scientific Eutech Elite CTS Pocket Tester with Pin/Cup Sensors

Conductivity/TDS/Salinity/Temperature

The Eutech Elite CTS pocket tester simultaneously displays conductivity/TDS/salinity with temperature. These measurements are ideal in applications such as environmental, agriculture, aquaculture & aquariums, hydroponics, pools & spas, education, and industrial (cooling towers). Applications in these industries may require a constant measurement of salinity and total dissolved solids (TDS). The TDS measurement is dependent on the mix of chemical species as well as the concentration while conductivity is only dependent on the concentration of chemical species, measuring the ions carrying an electrical current.

CTS pocket tester with pin sensor

CTS pocket tester with cup sensor

Specifications

Conductivity	Range	0.0 to 200.0 μ S 200 to 2000 μ S 2.00 to 20.00 mS
	Resolution	0.1 μ S / 1 μ S / 0.01 mS
	Relative Accuracy	\pm 1 % full scale
	Normalization Temperature	25.0 $^{\circ}$ C
	Temperature Coefficient	0.0 to 10.00 %
	Calibration Points	Up to 3 points
TDS	Range	0.0 to 100.0 ppm 100 to 1000 ppm 0.10 to 10.00 ppt (depending on TDS factor)
	Resolution	0.1 ppm / 1 ppm / 0.01 ppt
	Relative Accuracy	\pm 1 % full scale
	Calibration Points	Up to 3 points
TDS Factor	0.40 to 1.00	
Salinity	Range	0.00 to 10.00 ppt
	Resolution	0.10 ppt
	Relative Accuracy	\pm 1 % full scale
	Calibration Points	One
Temperature	Range	0 to 60.0 $^{\circ}$ C / 32.0 to 140.0 $^{\circ}$ F
	Resolution	0.1 $^{\circ}$ C / 0.1 $^{\circ}$ F
	Accuracy	From 0 to 50 $^{\circ}$ C (\pm 0.5 $^{\circ}$ C / \pm 0.9 $^{\circ}$ F + 1 LSD); From 50 to 60 $^{\circ}$ C (\pm 1.0 $^{\circ}$ C / \pm 1.8 $^{\circ}$ F + 1 LSD)
	Compensation	Yes (ATC)
	Calibration Window	\pm 5.0 $^{\circ}$ C / \pm 9.0 $^{\circ}$ F
Accessories	Replacement CTS sensor, soft carry case, lanyard, clear sample/storage cap, AAA batteries	

Ordering Information

Order Code Product Description

Pocket Tester

ELIRECTSPIN Thermo Scientific Eutech Elite conductivity/TDS/salinity pocket tester with pin sensor

ELIRECTSCUP Thermo Scientific Eutech Elite conductivity/TDS/salinity pocket tester with cup sensor

Conductivity Standard Solutions & Sachets

ECCON84BT 84 μ S/cm KCl, 480 mL

ECCON1413BT 1413 μ S/cm KCl, 480 mL

ECCON1288BT 12.88 mS/cm KCl, 480 mL

ECCON1413BS 1413 μ S/cm KCl, box of 20 x 20 mL sachets

TDS 442 Standard Solutions

EC442300BT 300 ppm 442, 480 mL

EC4421000BT 1000 ppm 442, 480 mL

EC4423000BT 3000 ppm 442, 480 mL

Salinity (NaCl) Standard Solutions

ECPS35STD35 Practical salinity standard, 480 mL

ECPS7STD7 4 practical salinity standard, 480 mL

Thermo Scientific Eutech Elite ORP Pocket Tester

ORP/RMV/Temperature

The Eutech Elite ORP pocket tester features a simultaneous display of the redox measurement with temperature. Oxidation-Reduction Potential (ORP) or Redox potential measurements are used to monitor chemical reactions, to quantify ion activity, or to determine the oxidizing or reducing properties of a solution. Ideal for applications such as hydroponics, food & beverage, environmental, drinking water, wastewater, agriculture, aquaculture & aquariums, pools & spas, education, and industrial (cooling towers).



Specifications

ORP/RMV	Range	-1000 to 1000 mV
	Resolution	±1 mV
	Relative Accuracy	±2 mV ±1 LSD
	Calibration Points	One
	Calibration Window	±200 mV
	Calibration Type	Off Set
Temperature	Range	0 to 60.0 °C / 32.0 to 140.0 °F
	Resolution	0.1 °C / 0.1 °F
	Accuracy	NA
	Compensation	Manual
	Calibration Window	0 to 60.0 °C / 32.0 to 140.0 °F
Accessories	Replacement sensor, soft carry case, lanyard, clear sample/storage cap, AAA batteries, calibration bottles	

Ordering Information

Order Code	Product Description
Pocket Tester	
ELITEORP	Thermo Scientific Eutech Elite ORP pocket tester

Storage & Cleaning Solutions

ECRE005	Storage solution for pH sensor, 480 mL
ECDPCBT	Protein remover solution, 480 mL

Thermo Scientific Eutech Elite pH and CTS Pocket Tester

pH/Conductivity/TDS/Salinity/Temperature


The Eutech Elite pH and CTS pocket tester simultaneously displays pH, conductivity/TDS/salinity with temperature. This offers a suitable method to measuring multiple parameters with just one meter. This tester can be used with the following applications: hydroponics, food & beverage, environmental, drinking water, wastewater, agriculture, aquaculture & aquariums, pools & spas, education, and industrial (cooling towers).



Specifications



pH	Range	-1.00 to 15.00 pH
	Resolution	0.01 pH
	Relative Accuracy	±0.01 pH ±1 LSD
	Calibration Points	Up to 3 points
	Buffer Set Standard Selection	USA - 4.01 / 7.00 / 10.01, NIST - 4.01 / 6.86 / 9.18
	Calibration Window	±1.00 pH
	Calibration Type	Point to point
Conductivity	Range	0.0 to 200.0 µS 200 to 2000 µS 2.00 to 20.00 mS
	Resolution	0.1 µS / 1 µS / 0.01 mS
	Relative Accuracy	±1 % full scale
	Normalization Temperature	25.0 °C
	Temperature Coefficient	0.0 to 10.00 %
	Calibration Points	Up to 3 points
TDS	Range	0.0 to 100.0 ppm 100 to 1000 ppm 0.10 to 10.00 ppt (depending on TDS factor)
	Resolution	0.1 ppm / 1 ppm / 0.01 ppt
	Relative Accuracy	±1 % full scale
	Calibration Points	Up to 3 points
	TDS Factor	0.40 to 1.00 (selectable)
Salinity	Range	0.00 to 10.00 ppt
	Resolution	0.10 ppt
	Relative Accuracy	±1 % full scale
	Calibration Points	One
Temperature	Range	0 to 60.0 °C / 32.0 to 140.0 °F
	Resolution	0.1 °C / 0.1 °F
	Accuracy	From 0 to 50 °C (±0.5 °C / ±0.9 °F + 1 LSD); From 50 to 60 °C (±1.0 °C / ±1.8 °F + 1 LSD)
	Compensation	Yes (ATC)
	Calibration Window	±5.0 °C / ±9.0 °F
Accessories	Replacement sensor, soft carry case, lanyard, clear sample/storage cap, AAA batteries, calibration bottles	

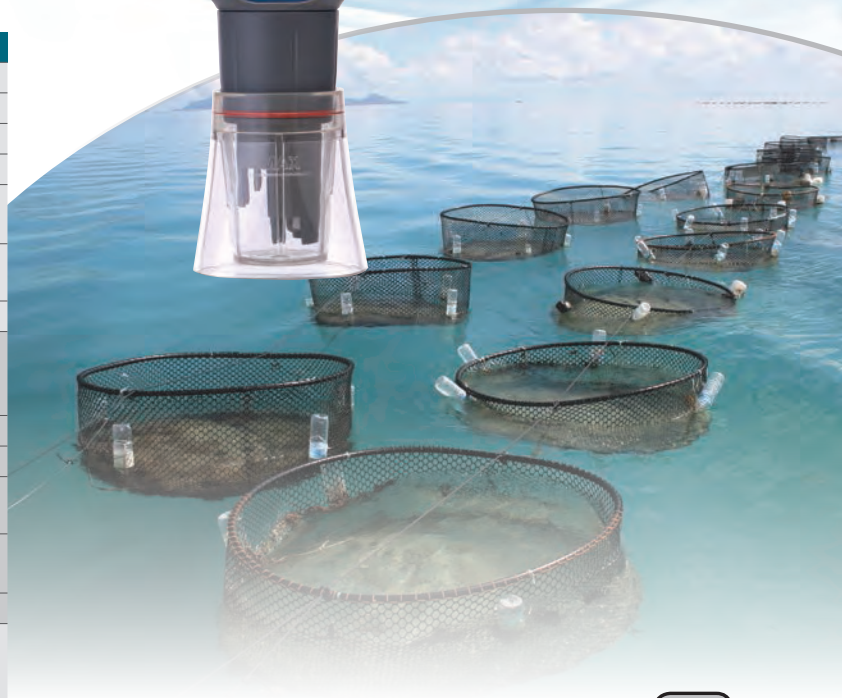

Ordering Information



Order Code	Product Description
Pocket Tester	
ELITEPCTS	Thermo Scientific Eutech Elite pH/conductivity/TDS/salinity pocket tester
Storage & Cleaning Solutions	
ECRE005	Storage solution for pH sensor, 480 mL
ECDPGBT	Protein remover solution, 480 mL
Conductivity Standard Solutions & Sachets	
ECCON100BT	100 µS/cm KCl, 480 mL
ECCON1413BT	1413 µS/cm KCl, 480 mL
ECCON1288BT	12.88 mS/cm KCl, 480 mL
ECCON1413BS	1413 µS/cm KCl, box of 20 x 20 mL sachets
TDS 442 Standard Solutions	
EC442300BT	300 ppm 442, 480 mL
EC4421000BT	1000 ppm 442, 480 mL
EC4423000BT	3000 ppm 442, 480 mL
Salinity (NaCl) Standard Solutions	
ECNACL5PPT	5 ppt NaCl, 480 mL

Thermo Scientific Eutech Elite pH Spear Pocket Tester

pH/Temperature

The Eutech Elite pH Spear pocket tester features a spear tip open pore sensor. This rugged and user-friendly tester is ideal for direct measurement of solid or semi-solid samples such as cheese, meat, fruit, bread and more. Used in applications such as hydroponics, food & beverage, environmental, drinking water, wastewater, agriculture, aquaculture & aquariums, pools & spas, education, and industrial (cooling towers).



Specifications

Specifications		
pH	Range	-1.00 to 15.00 pH
	Resolution	0.01 pH
	Relative Accuracy	±0.01 pH ±1 LSD
	Calibration Points	Up to 3 points
	Buffer Set Standard Selection	USA - 4.01 / 7.00 / 10.01, NIST - 4.01 / 6.86 / 9.18
	Calibration Window	±1.00 pH
	Calibration Type	Point to point
Temperature	Range	0 to 60.0 °C 32.0 to 140.0 °F
	Resolution	0.1 °C / 0.1 °F
	Accuracy	NA
	Compensation	Yes (MTC)
	Calibration Window	0 to 60.0 °C 32.0 to 140.0 °F
Accessories	Replacement pH sensor, soft carry case, lanyard, clear sample/storage cap, AAA batteries	

Ordering Information

Order Code	Product Description
Pocket Tester	
ELITEPHSPEAR	Thermo Scientific Eutech Elite pH Spear pocket tester
pH Buffer Sachets	
ECBU4BS	pH 4.01 (NIST traceable), box of 20 x 20 mL sachets
ECBU7BS	pH 7.00 (NIST traceable), box of 20 x 20 mL sachets
ECBU10BS	pH 10.01 (NIST traceable), box of 20 x 20 mL sachets
ECRINWT	pH deionized water (NIST traceable), box of 20 x 20 mL sachets
ECBU4710R	pH buffer sachet set, pH 4.01, 7.00, 10.01, deionized water, 5 x 20 mL each
Storage & Cleaning Solutions	
ECRE005	Storage solution for pH sensor, 480 mL
ECDCPBT	Protein remover solution, 480 mL

Common Specifications



General	Display	Graphic, dot matrix 80 x 100 pixel
	Backlight	Yes, selectable (30 sec from the last key press)
	Auto Off	8.5 min (from last key press)
	Reset	User / factory
	Hold Function	Yes
	Power Requirements	(4) AAA batteries
	Battery Life	>250 hr (pH, ORP, pH Spear) >150 hr (CTS, PCTS)
	Water Proofing	IP67
	Regulatory Certifications	CE, FCC
Environmental Operating Conditions	Ambient Operating Temperature	5 to 45 °C
	Relative Humidity	5 to 85 % non-condensing
	Storage Temperature	-20 to 60 °C
	Storage Humidity	5 to 85 % non-condensing



PCTS
Tester



pH Spear
Tester



pH Tester



CTS Tester
(Pin)



CTS Tester
(Cup)



ORP Tester

Water and Lab Products

Impex Produkter AS
Gamle Drammensvei 107
1363 HØVIK
Tel. 22 32 77 20
info@impex.no
www.impex.no

ThermoFisher
SCIENTIFIC