





Protimeter 30cm HygroProbe BLD8755 is used to measure Relative Humidity (RH) and temperature in remote places such as HVAC ducts in HVAC applications or deep into a wall or floor cavity. This probe is used with Protimeter devices with an attached cable interface.

# **Specifications**

### **Accuracy %RH:**

0% to 10% RH, ±4% RH at 68°F (20°C) 10% to 90% RH, ±2% RH at 68°F (20°C) 90% to 100% RH, ±4% RH at 68°F (20°C)

## **Temperature Range:**

32°F to 122°F (0°C to 50°C) ±0.6°F (±0.3°C)

## **Operating Environment:**

Temperature – 0°C to 80°C Humidity – 0 to 90% RH, non-condensing

### **Regulatory Compliance:**

CE, RoHS, ETL


## **Probe Care**

- · Avoid placing the probe in liquids
- · Always store in a dry, dust-free environment
- · Avoid touching the measuring element
- Only use with recommended Protimeter devices

#### For use with:

BLD8800 – Protimeter MMS2 BLD7750 – HygroMaster2

## **Probe Dimensions**

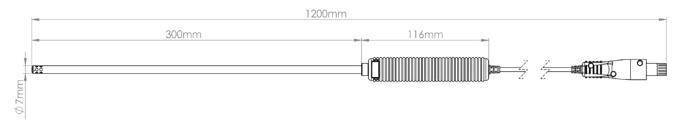

www.protimeter.com

www.amphenol-sensors.com

**Amphenol**Advanced Sensors

© 2017 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice.

Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.