

Polludrone®

Ambient Air Quality Monitoring System

Polludrone is a Continuous Ambient Air Quality Monitoring System (CAAQMS). It is capable of monitoring various environmental parameters related to air quality, noise, odour, weather, radiation etc. It measures the particulate matter and gaseous concentrations in the ambient air in real-time. Using external probes, it can also monitor other auxiliary parameters like traffic, disaster etc.

Polludrone is an ideal choice for smart cities as well as urban infrastructure applications like roadside, campus, and airport monitoring. It is easily integrable with a Smart Pole/Intelligent Pole.

Product Variants

Variant Name	Application	Parameter			
Polludrone Lite	General Purpose	PM _{2.5} , PM ₁₀ , CO ₂ , CO, Noise, Light, UV-Radiation, Temperature, Humidity			
Polludrone Smart	Extensive	PM _{2.5} , PM ₁₀ , CO ₂ , CO, SO ₂ , NO, NO ₂ , O ₃ , Noise, Light, UV-Radiation, Temperature, Humidity			
Polludrone Pro	Critical	PM1, PM2.5, PM10, PM100 (TSP), CO2, CO, SO2, NO, NO2, O3, H2S, Noise, Light, UV-Radiation, Temperature, Humidity			
External Modules	Optional	Wind Speed & Direction, Rainfall, Flood (integrable with all the 3 variants			





Smart City

Pollution monitoring at strategic locations in a smart-city empowers city authorities to obtain actionable insights for pollution control.



Campus Monitoring

Pollution monitoring at key locations on campus allows stakeholders to spread awareness about environmental conditions of the premises.



Road-side & Tunnels

Pollution monitoring at roads and tunnels can help create pollution mitigation action plan to control vehicular emissions.



Airport

Pollution and noise monitoring at taxiways and terminal surroundings facilitates airport authorities to analyze its impact on travellers and surrounding neighbourhoods

Powered by



Product Features



Patented Technology: Works on innovative e-breathing technology for higher data accuracy



Weather Resistant: IP66 Grade (certified) enclosure for endurance against harsh weather conditions



Solar Powered with Battery Backup: Compatible to charge internal battery using solar power



Tamper Proof: Comes with a security system to avoid tampering / malfunction / sabotage



Retrofit Design: Plug and play design for ease of implementation



Over-The-Air Update: Automatically upgradeable from a central server without any onsite visit



Compact: Light-weight and compact system that can be installed at 12-15 feet (4-5 m) height



Real-Time Data: Continuous monitoring and real-time data transfer at configurable intervals



Ultimate Durability: Made of high-grade engineering-metal and composite polymers for long life



Network Agnostic: Supports a wide range of connectivity options like GSM / GPRS / WiFi / LoRa / NBIoT/ Ethernet / Modbus



Identity & Configuration: Each equipment carries its unique identity with geo-tagging through wireless configuration



On-device Calibration: On-site device calibration capability using on-device calibration software

3 Levels of Calibration



Factory Calibration

The sensors are bump tested at Oizom factory to check their proper functioning for each parameter.



Lab Calibration

Laboratory calibration is performed for Baseline Correction & Span-Calibration for all the parameters to compensate for cross-sensitivity and ensure higher data accuracy.




Collocation Calibration

The sensors are calibrated against a reference station before installation and their performance is tested in the ambient condition before final deployment.

General Specifications

Size	360mm (H) x 328mm (W) x 200mm (D)
Weight	7.2 Kg (instrument weight)
Material	Aluminum Magnesium Alloy, Mild-steel (With Powder Coating), FRP
Certifications	CE & FCC Certified, PTCRB Certified Communication Module

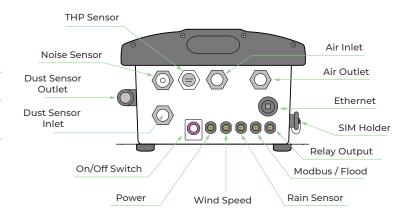

Communication

Data Interval	2-30 minutes (configurable)
Data-push Protocol	HTTP post request to host-server
Data-pull	HTTP request on device IP
Firmware Updates	Over-The-Air Firmware Update
Standby Connectivity	GSM (2G/3G/4G) for remote diagnosis, FOTA updates, and cloud calibration

Power

Avg. Power Consumption	5 Watt (Actual consumption depends upon the number of parameters)
Power Input Options	External 110-230V AC 50-60Hz, 40Watt Monocrystal Solar Panel
SMPS Specs	24V, 2Amps output UL-62368 & CAN/CSA C22.2 Certified
Battery Backup Time	12 Hours
Battery Specs	Lithium iron phosphate (LiFePO4) battery cell with rated voltage 12.8V Capacity 6Ah

Technical Specification

Processor	Quad Core ARM Cortex
Memory	2GB RAM / 8GB eMMC ROM
Device Interface	On-device Software / API
Operating Temperature	-20 °C to 60 °C
Operating Humidity	0-95% RH

	Connectivity Options	Specification
Wireless	CSM LORA LTE NB-lot Sigfox Wifi	Global 2G / 3G / 4G 868 MHz / 915 MHz CAT-M1 CAT-NB1 868 to 869 MHz, 902 to 928 MHz AP Mode and Station Mode
Wired	Ethernet Modbus Relay Output	Static / DHCP Configuration RS485 RTU / TCP 2 Channel

Parameters

ID	Parameter	Range	Resolution	Min. Detection	Drift	Working Principle	Measurement Principle	Sample Rate	Expected Sensor Life
OZPM_1	Suspended Particulate Matters with size less than 2.5µ (PM _{2.5})		ug/m³ Olug/m³ lug/m³ N.A Optical Particle						
OZPM_2	Suspended Particulate Matters with size less than 10µ (PM ₁₀)	Upto 5000 µg/m³		1 μg/m³	N.A.	Optical Particle Counter		1L/min	5000 hours
OZPM_3	Ultra Fine Particulate Matters with size less than 1µ (PM ₁)								
OZPM_4	Total Suspended Particulates (PM ₁₀₀)	Upto 30 mg/m³							
OZCO2_1	Carbon Dioxide (CO ₂)	0-5000 ppm	1 ppm	400 ppm	±5 ppm / Year	NDIR	Active	325 mL per sample	2 years
OZCO_3	Carbon Monoxide (CO)	0-1000 ppm	0.75 ppm	0.75 ppm	< 2% / Month	Electrochemical	Sampling		
OZSO2_1	Sulfur Dioxide (SO ₂)	0-20 ppm	0.001 ppm	0.01 ppm	±20 ppb / Year				
OZNO_1	Nitric Oxide (NO)	0-20 ppm	0.001 ppm	0.01 ppm	±50 ppb / Year				
OZNO2_1	Nitrogen Dioxide (NO ₂)	0-20 ppm	0.001 ppm	0.01 ppm	±20 ppb / Year				
OZO3_1	Ozone (O ₃)	0-20 ppm	0.001 ppm	0.01 ppm	±20 ppb / Year				
OZH2S_1	Hydrogen Sulfide (H ₂ S)	0-10 ppm	0.001 ppm	0.01 ppm	±100 ppb / Year				
OZN_1	Ambient Noise	Upto 140 dB	1 dB	0.5 dB	N.A.	Capacitive	Capacitive	N.A.	
OZLI_1	Light Intensity	Up to 1,00,000 Lux	1 Lux	1 Lux	N.A.	'	Passive Monitoring		3 years
OZUV_1	UV Radiation (0-12 UVI)	0.1-100,000 uW/cm2	0.1 uW/cm ²	0.1 uW/cm²	N.A.				
OZVLI_1	Visible Light Intensity	Up to 5000 Lux	0.1 Lux	0.1 Lux	N.A.				
OZTEMP_1	Temperature	-40 to 125°C	0.01°C	-40 °C	N.A.				
OZHUM_1	Humidity	100% Rh	0.1%	0.1%	N.A.				2 years
OZPRES_1	Barometric Pressure	300-1100 hPa	0.18 Pa	300 hPa	N.A.				

External Modules





Rain Sensor

🕒 Tipping Bucket

In mm / inch



Wind Sensor

🕒 Ultrasonic sensor

360°, 0-40 m/s



Flood Sensor

🐎 Ultrasonic sensor

Upto 765 cm

Functional Specification

Strategic Location Selection:

Proper location selection is critical for optimized data collection. It varies as per the purpose of the project. According to USEPA QA handbook (Vol II, Section 6.0 Rev.1), the selection of locations should be based on monitoring purposes such as:

- Real-time air quality public reporting
- Research monitoring
- Trends monitoring
- Compliance monitoring
- Emergency episode monitoring

Installation:

Preferred Mounting	Pole / Wall (preferably 270° open surrounding)
Installation Height	12-15 feet (4-5 meters)
Direction	As per maximum direct sunlight exposure (if ambient-light monitoring is a preference)
Power Availability	Constant AC supply within a 2-meter range from the unit or solar panel
Network Availability	Uninterrupted network connection



Operation:

When the device is powered on, the device intakes air samples at a predefined frequency through the air sampling system. Once the air sample is stabilized, the sensory system takes multiple readings during the sampling time and performs relevant data-processing. During this cycle time, the device flushes out old air sample and pulls in a fresh one. After each sampling, the data processing system sends the processed data to the central server using a built-in communication module

Maintenance:



Cleaning: Periodic cleaning is important to ensure optimum device performance. Monthly or quarterly regular maintenance activity has to be carried out depending upon the surrounding. The activity includes cleaning the dome for the light sensor, air inlet, and outlet mesh & general cleaning of the exterior.



Sensor Replacement: Every sensor has a limited life span. The sensor life depends on the average pollutant concentration in the area. The sensors need to be replaced once their performance starts to deteriorate and the system starts giving unstable data.



Spot-Calibration: The frequency of calibration is decided based on atmospheric conditions and individual sensor drift to ensure data accuracy. Spot calibration can be performed using reference equipment which can also be a recently calibrated Oizom device.



Diagnosis/Debugging: Power and network availability are the prime check in case of equipment failure. If the issue is still unresolved after remote diagnosis, on-site troubleshooting can be planned by an engineer.

Accurate Air Quality Monitoring And Advanced Data Analytics



www.oizom.com



306, Indraprasth Corporate,
Prahladnagar, Ahmedabad - India

i contact@oizom.com / connect@oizom.com

i +91 88666 60025 / 39

Impex Produkter AS Gamle Drammensvei 107 1363 HØVIK www.impex.no info@impex.no Tel.: 22 32 77 20

© Oizom Instruments Pvt. Ltd. | PB01-V6.3