

# KERN 440-21A

The classic balance in the laboratory

# KERN®



## Measuring system

Adjustment options:	External calibration
Linearity:	3 mg
Minimum weight (USP):	2 g
Readability [d]:	1 mg
Recommended adjusting weight:	50 g (F2)
Repeatability:	1 mg
Resolution:	60000
Stabilisation time under laboratory conditions:	3 s
Warm up time:	2 h
Weighing capacity [Max]:	60 g
Weighing system:	Strain gauge
Weighing units:	ct dwt g gn mo oz oz t (HK) tl (Tw) tol

## Display

Display digit height:	1,500 cm
-----------------------	----------

## Counting

Counting resolution:	30000
Minimum piece weight at piece counting (Laboratory):	2 mg
Minimum piece weight at piece counting (Normal):	20 mg

## Functions

Counting function:	yes
Percentage determination:	yes
Vibration-free weighing (Animal weighing program):	yes

## Environmental conditions

Maximum humidity:	80 %
Maximum operating temperature:	35 °C
Minimum ambient temperature:	5 °C

## Power supply

Battery:	9 V Block
Charging time:	10 h
Input voltage:	220 V - 240 V AC 50 Hz
Mains adapter/adaptor included:	CH EURO UK US
Operating time:	20 h
Operating time (Backlight off):	20 h
Rechargeable battery:	Rchrg. battery optional

## Service

Adjustment at the location of installation: 961-247

DAkkS Certificate:	963-127
--------------------	---------

## Category

Brand:	KERN
Category:	Balances
Product Group:	Precision balance

## Packaging & shipping


Delivery:	24 h
Dimensions packaging (WxDxH):	340 x 210 x 170 mm
Gross weight:	1,340 kg
Net weight:	930 g
Shipping method:	Parcel service

## Construction

Casing material:	Plastic
Dimensions draft shield (ÃxH):	106   42
Dimensions housing (WxDxH):	165 x 230 x 80 mm
Weighing space (ÃxH):	90   40
Weighing surface (d):	81

## Piktogramme

### STANDARD

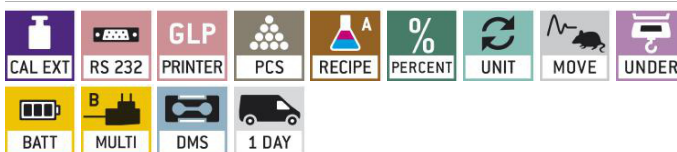

### OPTION

