

# KERN SFB 100K-2XL



Stainless steel platform scales with IP65 protection, also with XL platform or EC type approval [M]



## Measuring system

Adjustment options:	External calibration
Linearity:	20 g
Load cell connection:	6-wire
Readability [d]:	10 g
Recommended adjusting weight:	100 kg (M1)
Repeatability:	10 g
Resolution:	10000
Stabilisation time under laboratory conditions:	2 s
Tare range:	100 kg
Warm up time:	30 min
Weighing capacity [Max]:	100 kg
Weighing system:	Strain gauge
Weighing units:	kg

## Display

Display digit height:	5,200 cm
-----------------------	----------

## Functions

Counting function:	yes
Function to save totals:	yes
Vibration-free weighing (Animal weighing program):	yes
Weighing with tolerance range:	yes

## Environmental conditions

Maximum humidity:	95 %
Maximum operating temperature:	40 °C
Minimum ambient temperature:	-10 °C
Minimum humidity:	0 %

## Power supply

Charging time:	12 h
Input voltage:	110 V - 230 V AC
Mains adapter:	Mains adapter external
Mains adapter/adaptor included:	CH EURO UK US
Operating time (Backlight off):	35 h
Operating time (Backlight on):	20 h

## Service

Adjustment at the location of installation: 961-249

DAkkS Certificate: 963-129

## Category

Brand:	KERN
Category:	Balances
Product Group:	Industrial scale

## Packaging & shipping

Delivery:	24 h
Dimensions packaging (WxDxH):	1045 x 675 x 250 mm
Gross weight:	27,300 kg
Net weight:	24,500 kg
Shipping method:	Parcel service
UN number:	2800

## Construction

Cable length of display device:	3 m
Dimensions of display device (WxDxH):	266 x 165 x 96 mm
Dimensions of weighing plate (WxDxH):	650 x 500 x 142 mm
Level indicator:	yes
Material weighing plate:	stainless steel
Overall dimensions mounted (WxDxH):	650 x 660 x 590 mm
Revolving screw feet:	yes
Wall mount:	yes
Weighing surface (WxD):	650 x 500 mm


# KERN SFB 100K-2XL



Stainless steel platform scales with IP65 protection, also with XL platform or EC type approval [M]

## Piktogramme

### STANDARD

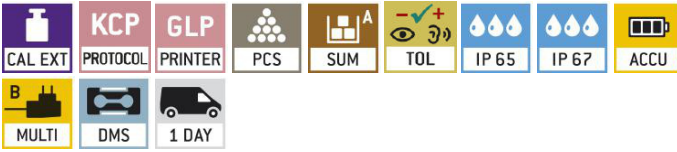

### OPTION



### FACTORY

